

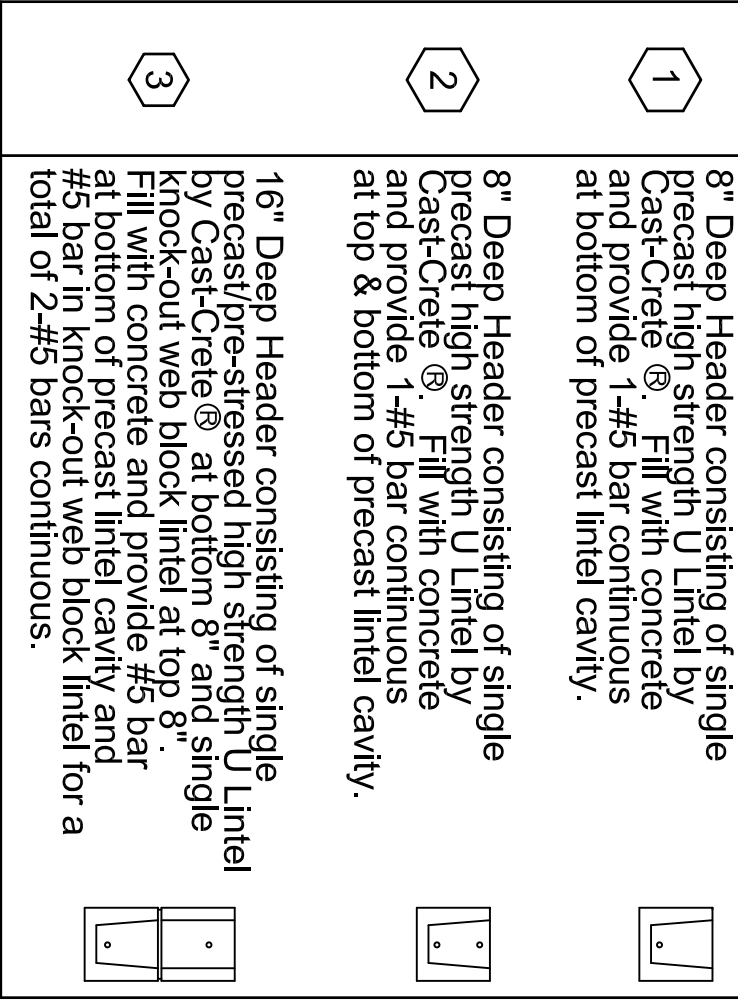
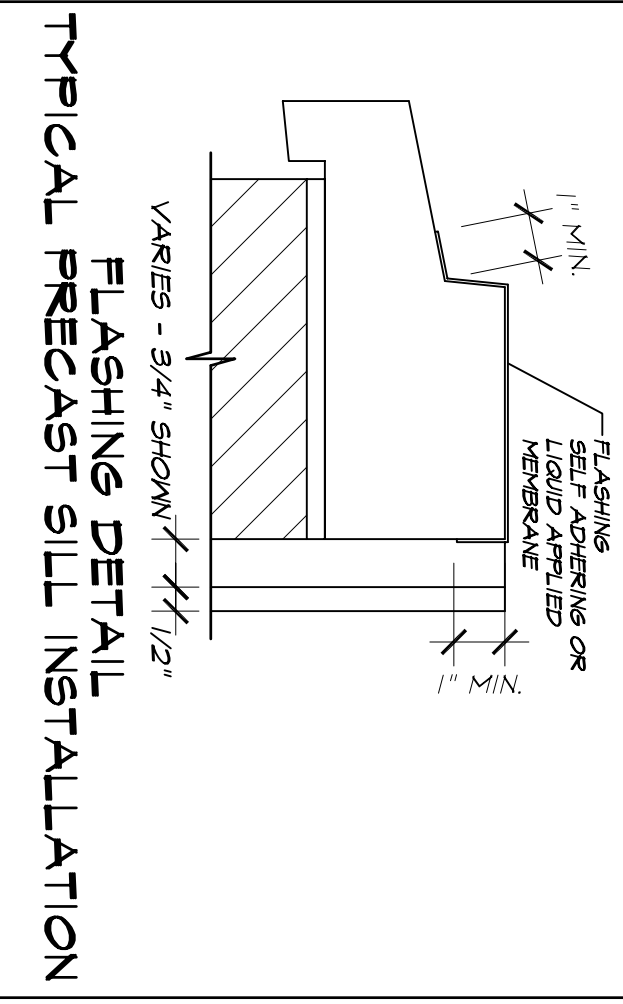


MARK	DESCRIPTION
1	8" Deep Header consisting of single precast high strength U Lintel by Cast-Crete®. Fill with concrete and provide 1-#5 bar continuous at bottom of precast lintel cavity.
2	8" Deep Header consisting of single precast high strength U Lintel by Cast-Crete®. Fill with concrete and provide 1-#5 bar continuous at top & bottom of precast lintel cavity.
3	16" Deep Header consisting of single precast/pre-stressed high strength U Lintel by Cast-Crete® at bottom 8" and single knock-out web block lintel at top 8". Fill with concrete and provide #5 bar at bottom of precast lintel cavity and #5 bar in knock-out web block lintel for a total of 2-#5 bars continuous.

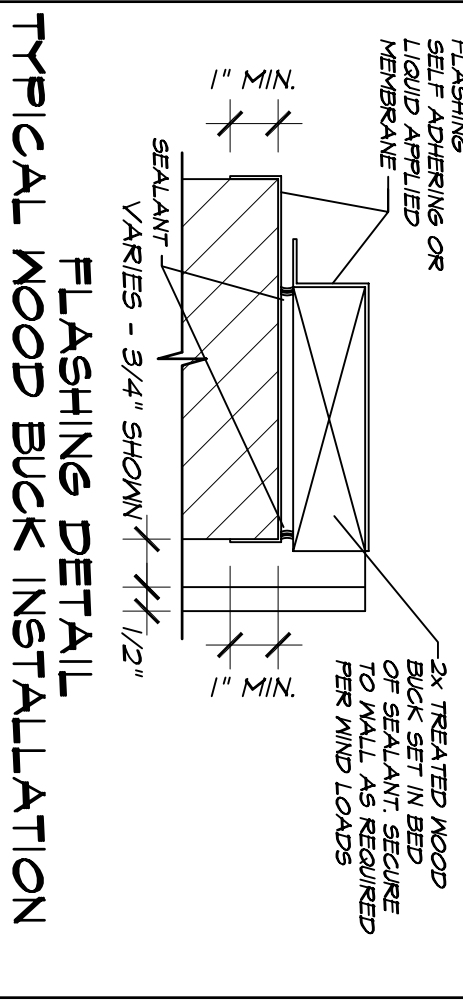


PRE-CAST LINTEL SCHEDULE
 BASED ON CAST-CRETE®
 0 TO 6' B/B-O/B/T PRE-CAST
 6 TO 10' B/B-O/B/T PRE-CAST
 10 TO 14' B/B-O/B/T PRE-CAST
 OVER 14' B/B-O/B/T PRE-STRESSED
 PROVIDE MIN. 4" BEARING AT EACH END OF LINTEL, TYP


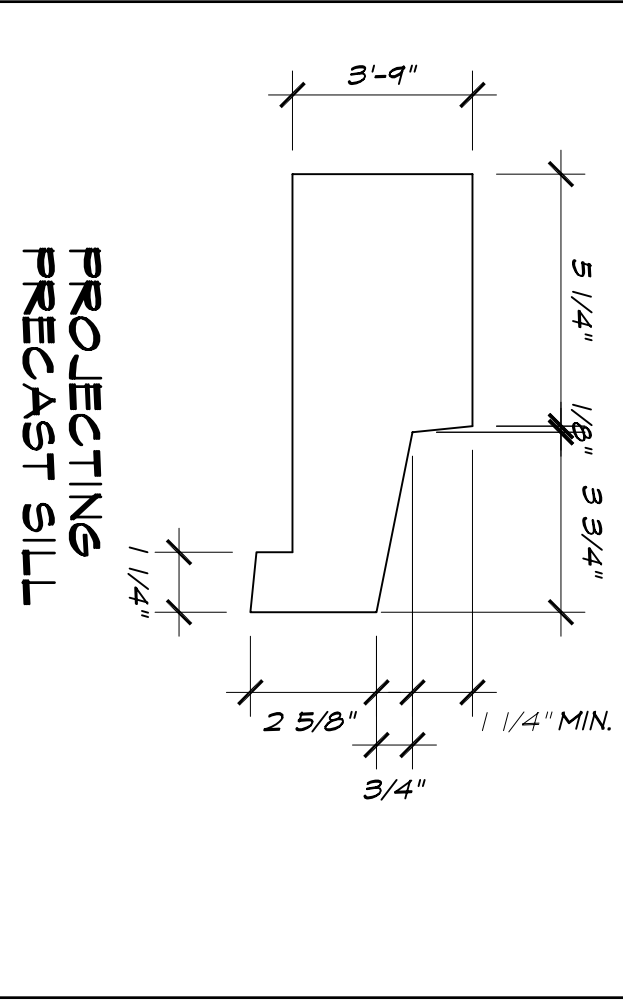


OPENING WIDTH	BEARING MALL OR SHEAR MALL	NON-BEARING MALL
0'-0" TO 3'-0"	(2) 2X4	(2) 2X4
3'-0" TO 3'-6"	(2) 2X6	(2) 2X6
3'-6" TO 4'-0"	(2) 2X8	(2) 2X8
4'-0" TO 4'-6"	(2) 2X10	(2) 2X10
4'-6" TO 5'-0"	(2) 2X12	(2) 2X12


NOTES:
 1. USE HEADER SIZE ABOVE ALSO CONSIDER WIDTH OF FINISHING PLAN.
 2. MINIMUM FINISH BEARS (SCHED. SIZES) MUST BE SHOWN.
 3. 2000 PSI STRENGTH FIBER IN REINFORCING SHALL BE THE MINIMUM OF ELONGATION.
 4. 2000 PSI STRENGTH FIBER IN REINFORCING SHALL BE THE MINIMUM OF ELONGATION.
 5. 2000 PSI STRENGTH FIBER IN REINFORCING SHALL BE THE MINIMUM OF ELONGATION.

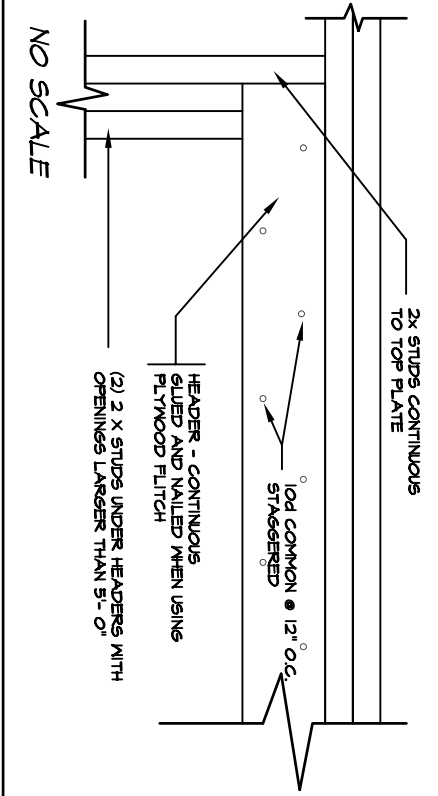

WINDOW/DOOR HEADER SCHEDULE
 OPENINGS UP TO 6' 1-1/2" FL. W/2-2X12 HEADER
 6'-0" TO 8'-0" FL. W/2-2X12 HEADER
 8'-0" TO 10'-0" FL. W/2-2X12 HEADER
 10'-0" TO 12'-0" FL. W/2-2X12 HEADER
 12'-0" TO 14'-0" FL. W/2-2X12 HEADER
 14'-0" TO 16'-0" FL. W/2-2X12 HEADER
 16'-0" TO 18'-0" FL. W/2-2X12 HEADER
 18'-0" TO 20'-0" FL. W/2-2X12 HEADER
 20'-0" TO 22'-0" FL. W/2-2X12 HEADER
 22'-0" TO 24'-0" FL. W/2-2X12 HEADER
 24'-0" TO 26'-0" FL. W/2-2X12 HEADER
 26'-0" TO 28'-0" FL. W/2-2X12 HEADER
 28'-0" TO 30'-0" FL. W/2-2X12 HEADER
 30'-0" TO 32'-0" FL. W/2-2X12 HEADER
 32'-0" TO 34'-0" FL. W/2-2X12 HEADER
 34'-0" TO 36'-0" FL. W/2-2X12 HEADER
 36'-0" TO 38'-0" FL. W/2-2X12 HEADER
 38'-0" TO 40'-0" FL. W/2-2X12 HEADER
 40'-0" TO 42'-0" FL. W/2-2X12 HEADER
 42'-0" TO 44'-0" FL. W/2-2X12 HEADER
 44'-0" TO 46'-0" FL. W/2-2X12 HEADER
 46'-0" TO 48'-0" FL. W/2-2X12 HEADER
 48'-0" TO 50'-0" FL. W/2-2X12 HEADER
 50'-0" TO 52'-0" FL. W/2-2X12 HEADER
 52'-0" TO 54'-0" FL. W/2-2X12 HEADER
 54'-0" TO 56'-0" FL. W/2-2X12 HEADER
 56'-0" TO 58'-0" FL. W/2-2X12 HEADER
 58'-0" TO 60'-0" FL. W/2-2X12 HEADER
 60'-0" TO 62'-0" FL. W/2-2X12 HEADER
 62'-0" TO 64'-0" FL. W/2-2X12 HEADER
 64'-0" TO 66'-0" FL. W/2-2X12 HEADER
 66'-0" TO 68'-0" FL. W/2-2X12 HEADER
 68'-0" TO 70'-0" FL. W/2-2X12 HEADER
 70'-0" TO 72'-0" FL. W/2-2X12 HEADER
 72'-0" TO 74'-0" FL. W/2-2X12 HEADER
 74'-0" TO 76'-0" FL. W/2-2X12 HEADER
 76'-0" TO 78'-0" FL. W/2-2X12 HEADER
 78'-0" TO 80'-0" FL. W/2-2X12 HEADER
 80'-0" TO 82'-0" FL. W/2-2X12 HEADER
 82'-0" TO 84'-0" FL. W/2-2X12 HEADER
 84'-0" TO 86'-0" FL. W/2-2X12 HEADER
 86'-0" TO 88'-0" FL. W/2-2X12 HEADER
 88'-0" TO 90'-0" FL. W/2-2X12 HEADER
 90'-0" TO 92'-0" FL. W/2-2X12 HEADER
 92'-0" TO 94'-0" FL. W/2-2X12 HEADER
 94'-0" TO 96'-0" FL. W/2-2X12 HEADER
 96'-0" TO 98'-0" FL. W/2-2X12 HEADER
 98'-0" TO 100'-0" FL. W/2-2X12 HEADER

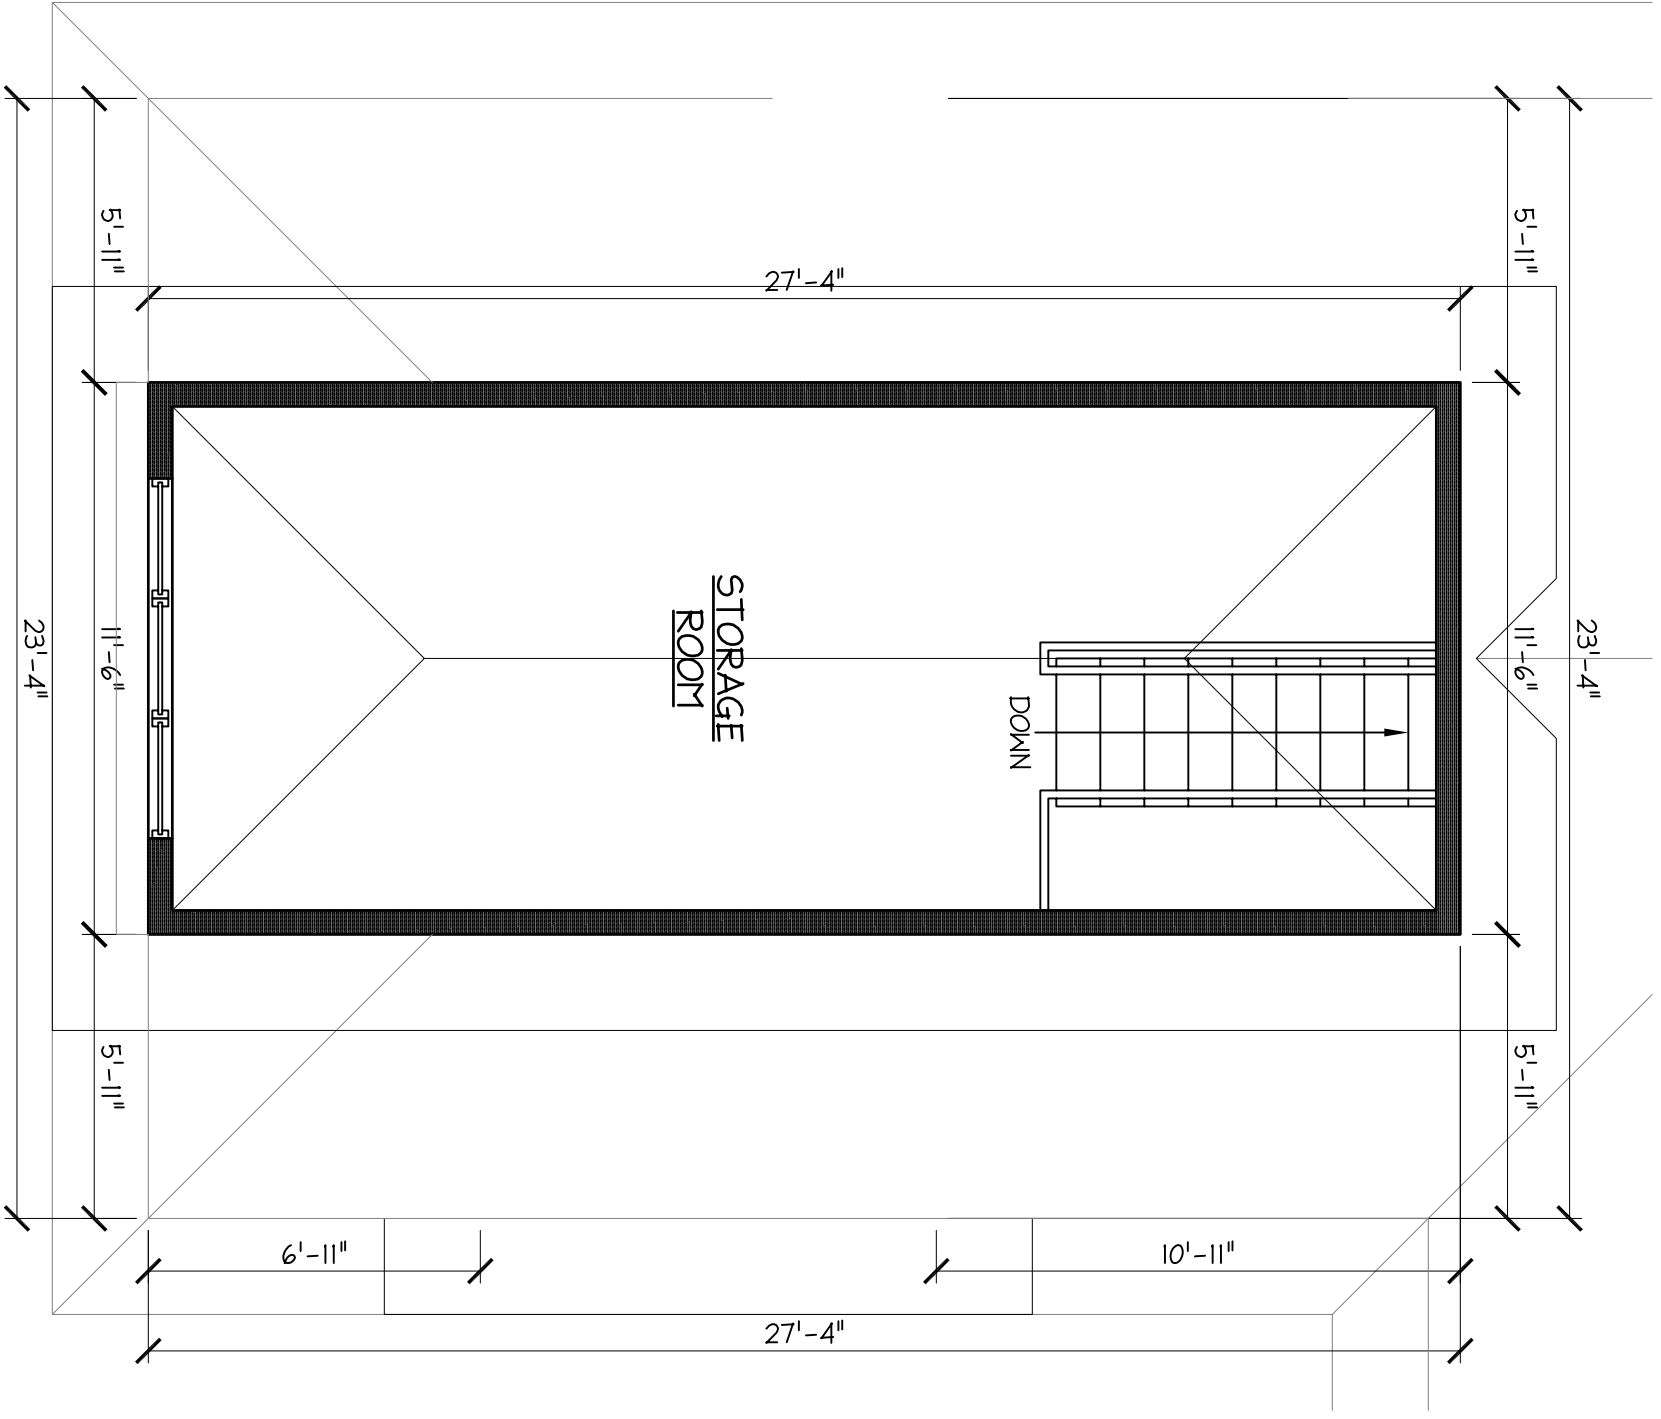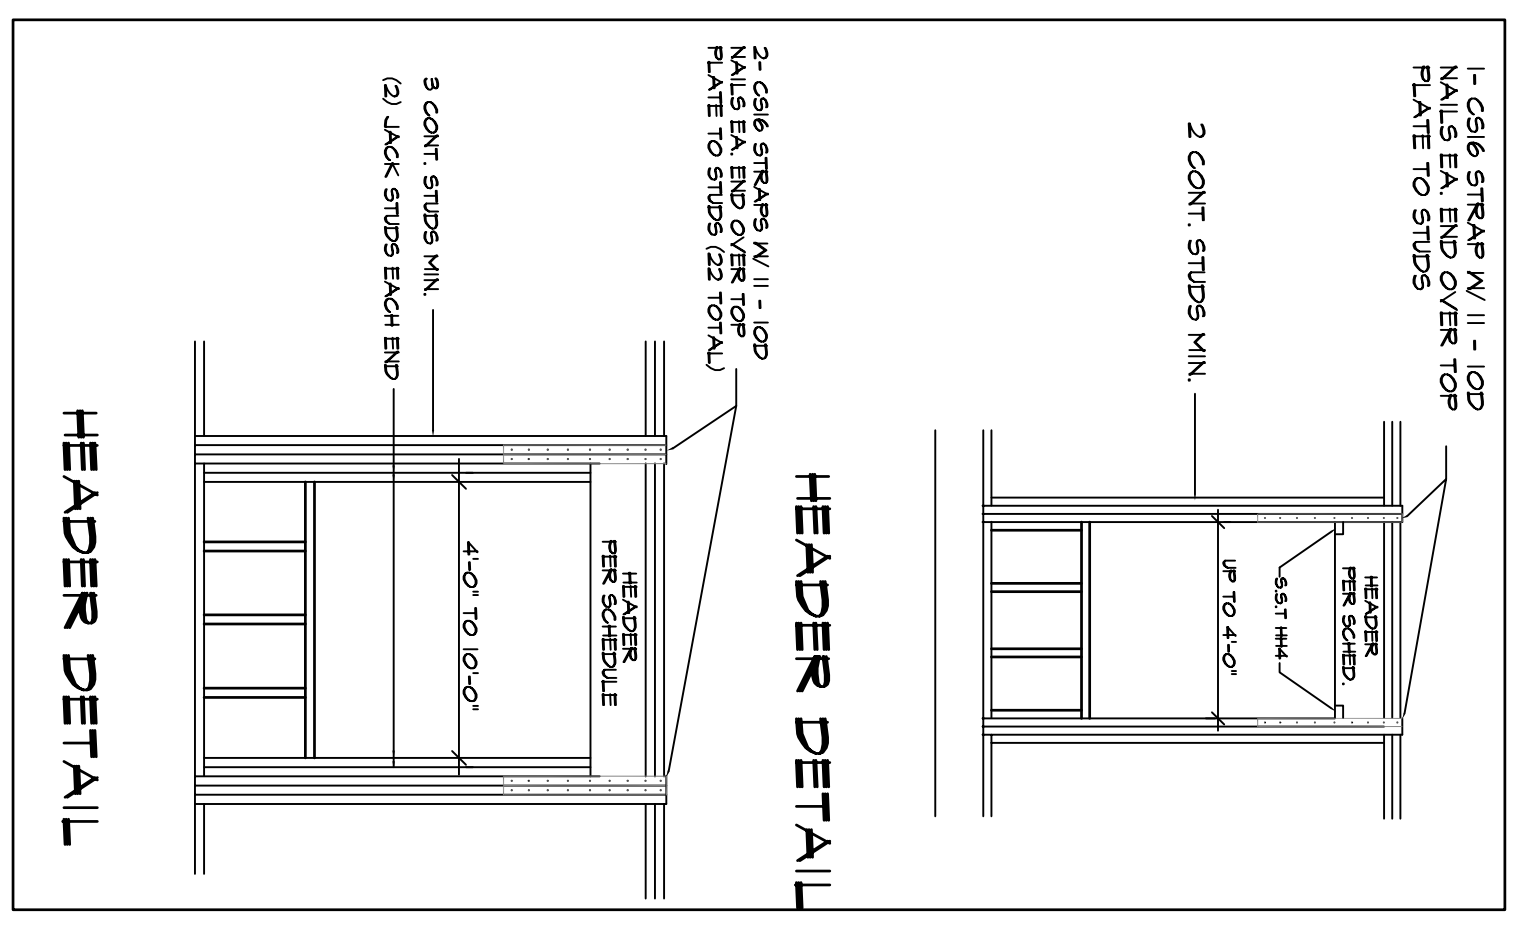

STORAGE PLAN
 SCALE: 1/4" = 1'-0"

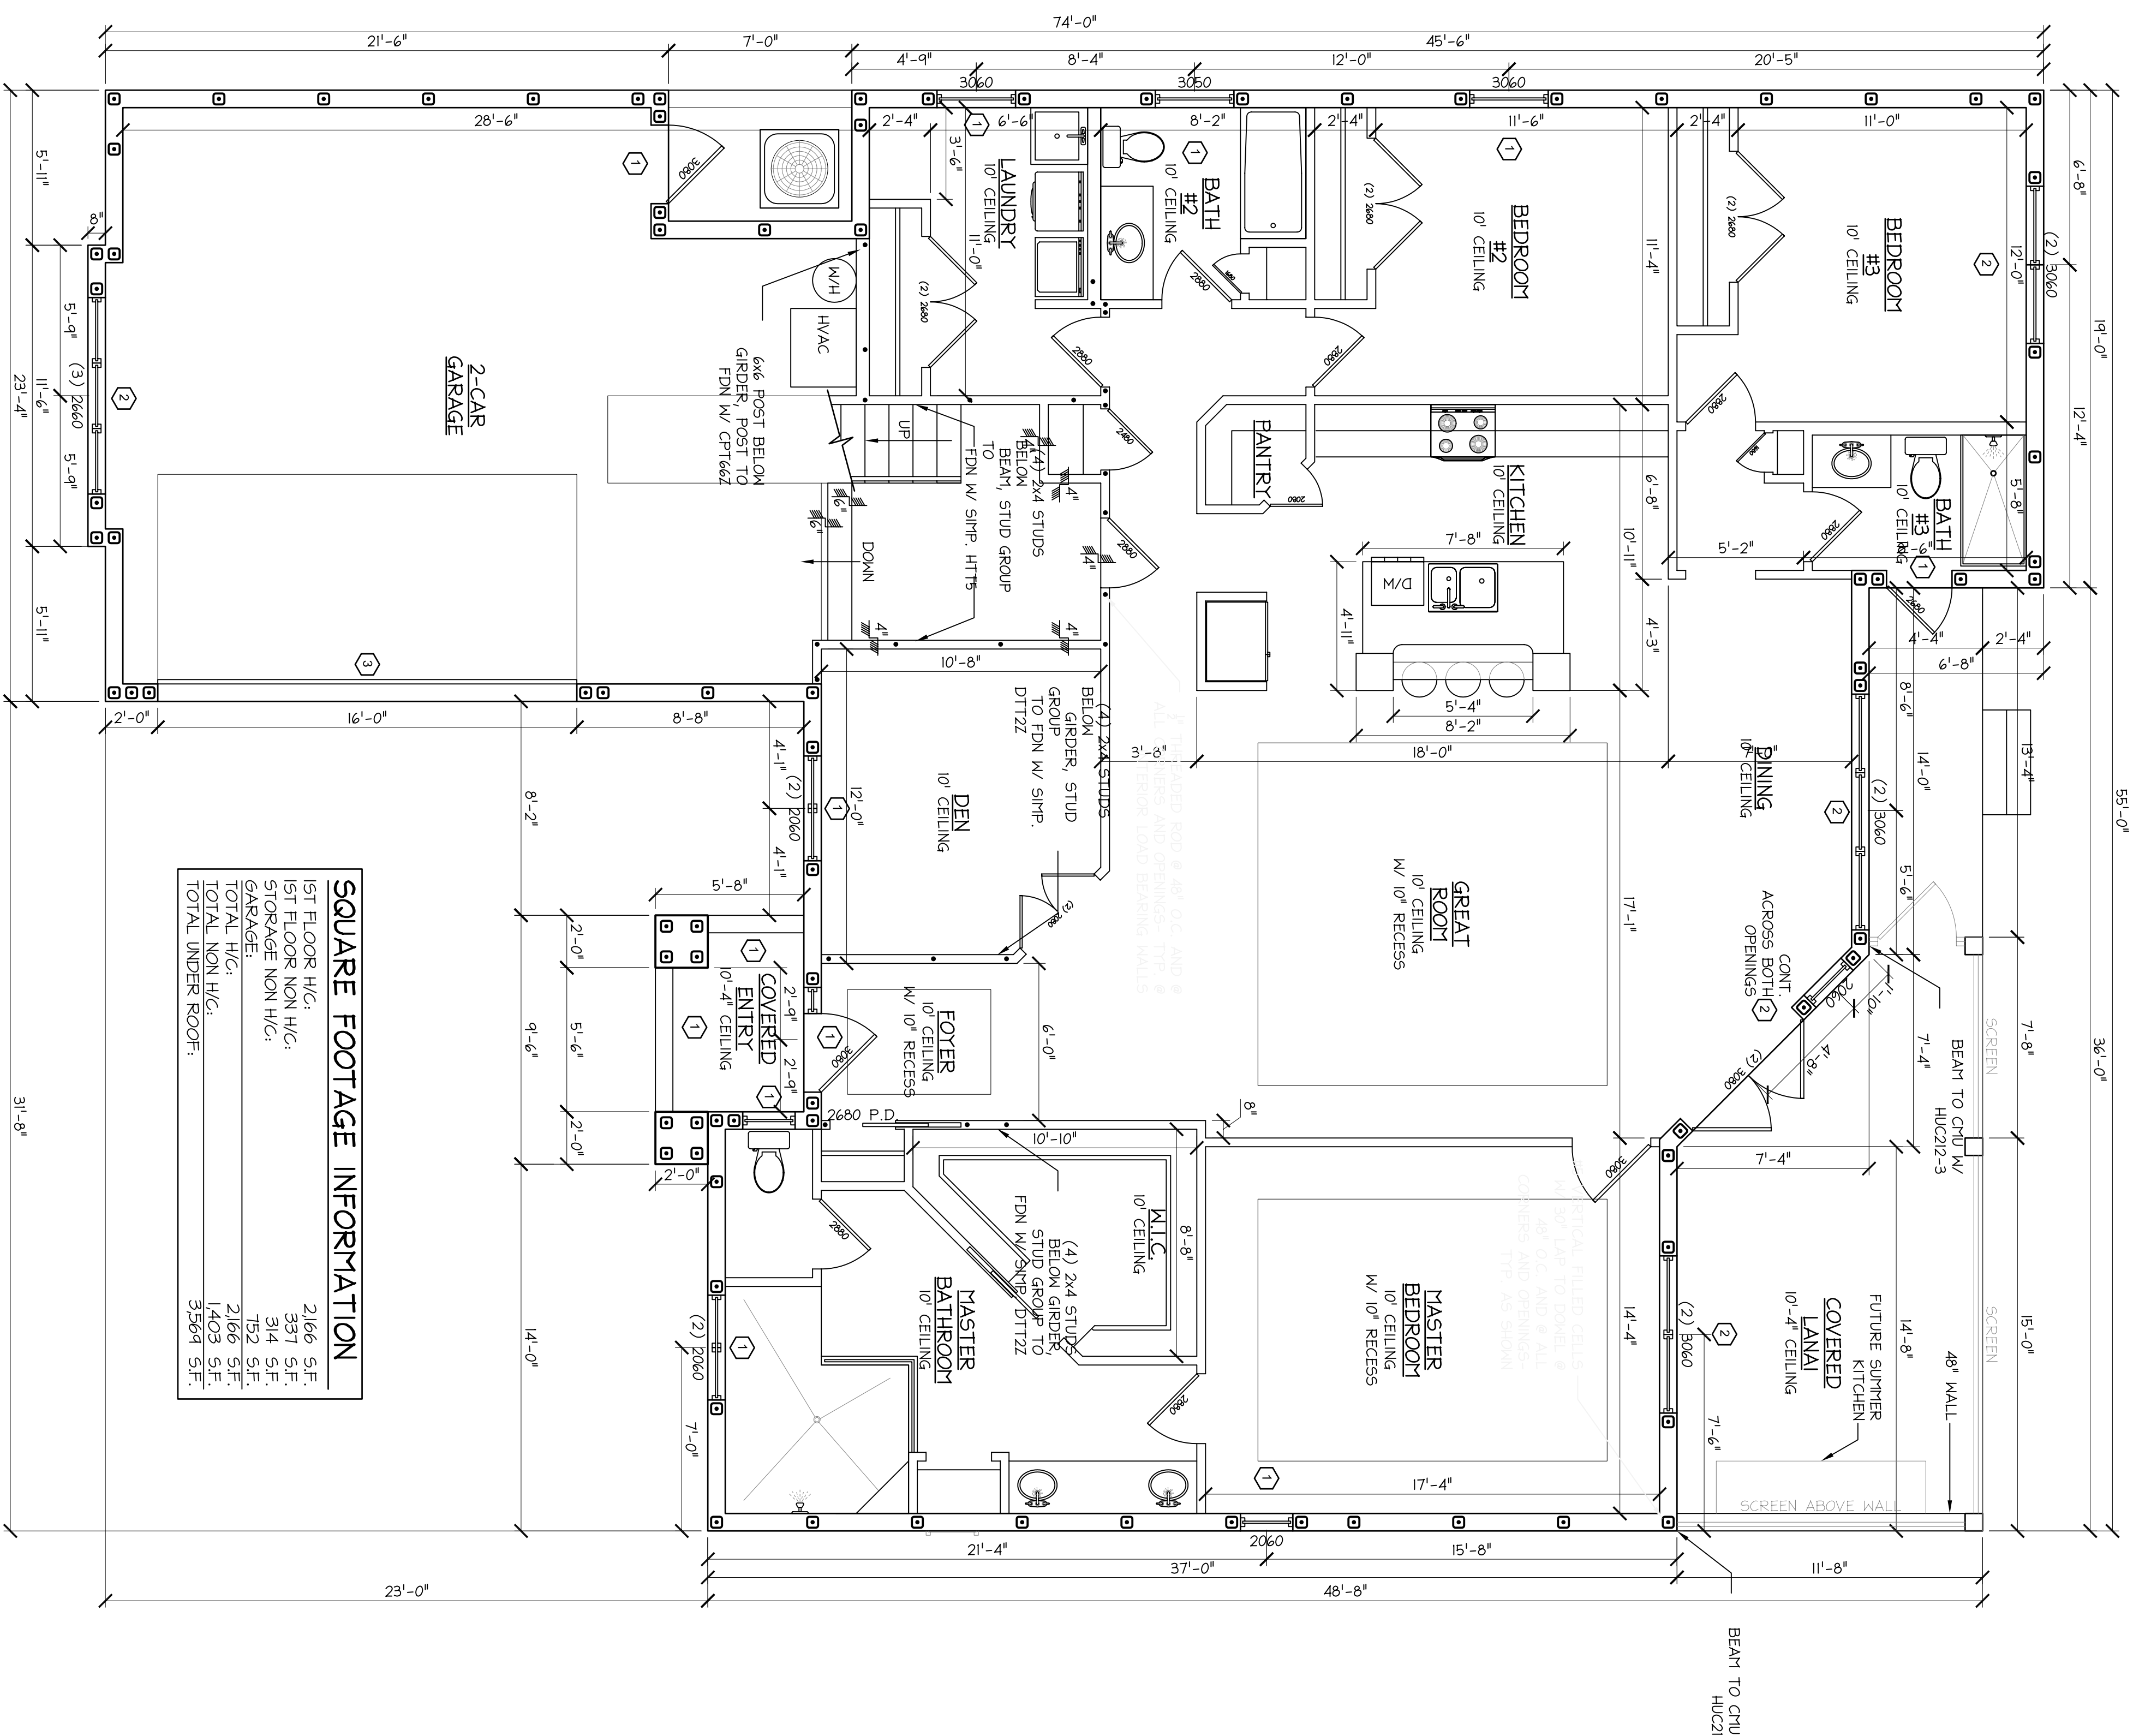

SQUARE FOOTAGE INFORMATION	
1ST FLOOR H/C:	2,166 S.F.
1ST FLOOR NON H/C:	337 S.F.
STORAGE NON H/C:	314 S.F.
GARAGE:	752 S.F.
TOTAL H/C:	2,166 S.F.
TOTAL NON H/C:	1,403 S.F.
TOTAL UNDER ROOF:	3,569 S.F.

FIRST FLOOR PLAN
 SCALE: 1/4" = 1'-0"

Bruns Builders Services
 Your home, your way, your builder.